



# HiBoost 15K Smart Link Consumer Booster Series

## Product Overview


The HiBoost 15K Smart Link is a state of the art 2G, 3G and 4G LTE cell phone signal booster designed for home or office use, so you can cover dead zones, eliminate dropped calls, and improve your overall data and coverage quality. The Home 15K Smart Link powerful boosting capabilities easily cover a range of up to 15,000 square feet and boasts a +70-decibel max gain. Enjoy lightning fast downloads, streaming and crystal-clear calls!

### Key Features:

- Coverage up to 15,000 square feet
- (+) 70-Maximum Gain
- Compatible with all major US and Canadian carriers
- FCC and IC certified devices
- 3-Years Manufacture Warranty



## How it Works

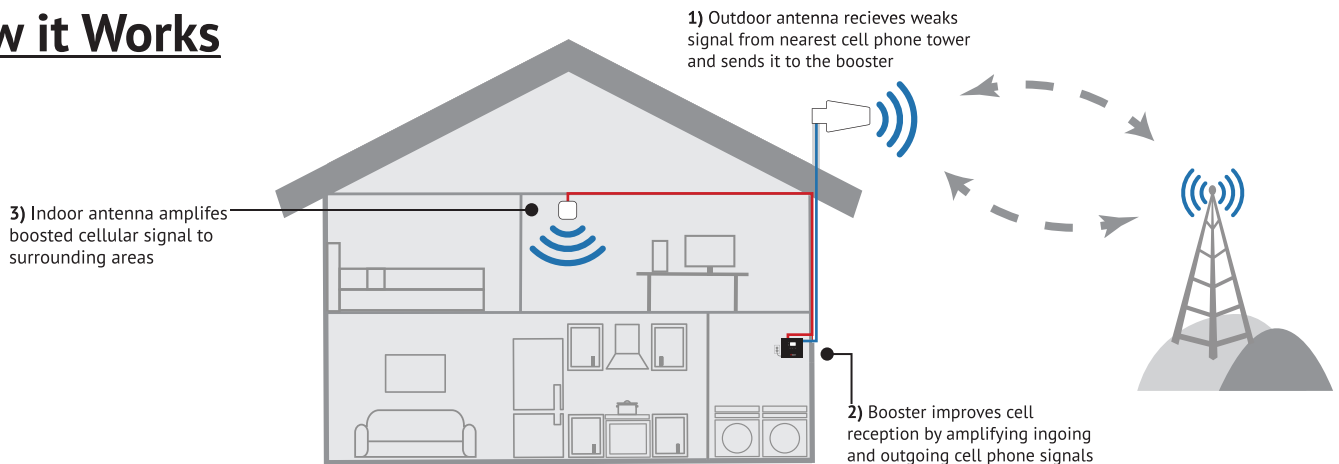

Please contact our customer support for more information.

Email: [info@hiboostusa.com](mailto:info@hiboostusa.com)

Phone: (972) 870-5666





## Technical Specifications

### HiBoost 15K Smart Link

Model: F20G-5S-BTW

---

<b>Working Bands</b>	698-716 / 776-787 / 824-849 / 1850-1915 / 1710-1755
<b>UL Frequency Range</b>	728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155
<b>DL Frequency Range</b>	Band 12 / Band 13 / Band 5 / Band 25-2 / Band 4
<b>Supported Standards</b>	CMDA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all other cellular standards
<b>Maximum Gain</b>	70 dB
<b>Maximum Output Power</b>	UL 24 dBm, DL 12 dBm
<b>MGC (Step Attenuation)</b>	≥ 25 dB / 1 dB step
<b>I/O Port</b>	N-Female
<b>Impedance</b>	50 ohm
<b>Environment Condition</b>	IP40
<b>Dimensions</b>	8.6 in x 6.5 in x 2 in / 218 mm x 165 mm x 50 mm
<b>Weight</b>	≥ 5.0 lb / 2.2 kg
<b>Power Supply</b>	Input AC 100~240 V, 50/60 Hz, Output DC 12 V/3 A

This is a **CONSUMER** device.

**BEFORE USE**, you **MUST REGISTER THIS DEVICE** with your wireless provider and have your provider's consent. Most wireless providers consent to the use of signal boosters. Some providers may not consent to the use of this device on their network. If you are unsure, contact your provider.

In Canada, BEFORE USE, you must meet all requirements set out in ISED CPC-2-1-05.

You **MUST** operate this device with approved antennas and cables as specified by the manufacturer. Antennas **MUST** be installed least 20 cm (8 inches) from (i.e., **MUST NOT be installed within 20 cm of**) any person.

You **MUST** cease operating this device immediately if requested by the FCC (or ISED in Canada) or a licensed wireless service provider.

**WARNING.** E911 location information may not be provided or may be inaccurate for calls served by using this device.

This device may be operated **ONLY** in a fixed location (i.e., may operate in a fixed location only) for in-building use.