



HiBoost SLX

Commercial Booster Series

Product Overview


The HiBoost SLX is a state of the art 2G, 3G and 4G LTE cell phone signal booster designed for commercial use, so you can cover dead zones, eliminate dropped calls, and improve your overall data and coverage quality. The SLX's powerful boosting capabilities easily cover a range of up to 35,000 square feet and boasts a +72-decibel max gain. Enjoy lightning fast downloads, streaming and crystal-clear calls!

Key Features:

- Coverage up to 35,000 square feet
- (+) 72-Maximum Gain
- Compatible with all major US and Canadian carriers
- FCC and IC certified devices
- 3-Years Manufacture Warranty



How it Works

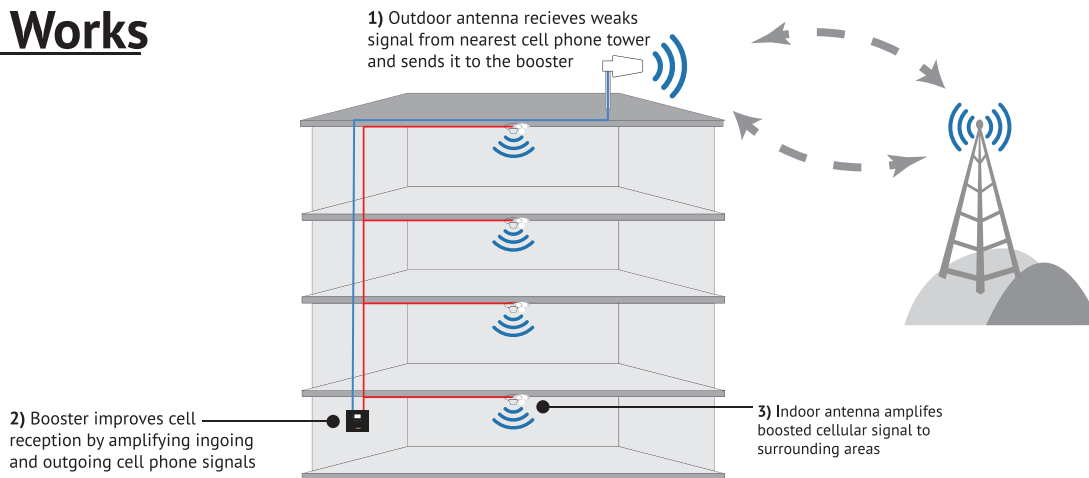

All accessories are available separately. Contact us for more information about a RF site analysis.

Email: info@hiboostusa.com

Phone: (972) 870-5666





Technical Specifications

HiBoost SLX

Model: Pro25-5S-IOT

Working Bands	698-716 / 776-787 / 824-849 / 1850-1915 / 1710-1755
UL Frequency Range	728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155
DL Frequency Range	Band 12 / Band 13 / Band 5 / Band 25-2 / Band 4
Supported Standards	CMDA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all other cellular standards
Maximum Gain	72 dB
Maximum Output Power	UL 24 dBm, DL 15 dBm
MGC (Step Attenuation)	≥ 25 dB / 1 dB step
I/O Port	N-Female
Impedance	50 ohm
Environment Condition	IP40
Dimensions	8.7 in x 7.3 in x 2.2 in / 220 mm x 185 mm x 55 mm
Weight	≤ 11 lb / 5 kg
Power Supply	Input AC 100-240 V, 50/60 Hz, Output DC 12 V/3 A

This is a **CONSUMER** device.

BEFORE USE, you **MUST REGISTER THIS DEVICE** with your wireless provider and have your provider's consent. Most wireless providers consent to the use of signal boosters. Some providers may not consent to the use of this device on their network. If you are unsure, contact your provider.

In Canada, BEFORE USE, you must meet all requirements set out in ISED CPC-2-1-05.

You **MUST** operate this device with approved antennas and cables as specified by the manufacturer. Antennas **MUST** be installed least 20 cm (8 inches) from (i.e., **MUST NOT be installed within 20 cm of**) any person.

You **MUST** cease operating this device immediately if requested by the FCC (or ISED in Canada) or a licensed wireless service provider.

WARNING. E911 location information may not be provided or may be inaccurate for calls served by using this device.

This device may be operated **ONLY** in a fixed location (i.e., may operate in a fixed location only) for in-building use.